

PRO-LINE

1977 Dodge RAMCHARGER


ASSEMBLY INSTRUCTIONS

Congratulations on your purchase of one of the most highly-detailed polycarbonate bodies ever created by Pro-Line's R & D department: the 1977 Dodge Ramcharger! Before you get started on your build, please take time to read over these important instructions.

1 PICK-UP OR SUV?

First things first: do you want to style your Ramcharger in the classic, open-air **PICK-UP** truck configuration? Or complete the **SUV** look by using the camper shell?

You will have to decide this first, as certain sections that are to be trimmed off will affect how the body fits together, and/or will make it difficult to revert back to the opposite style.

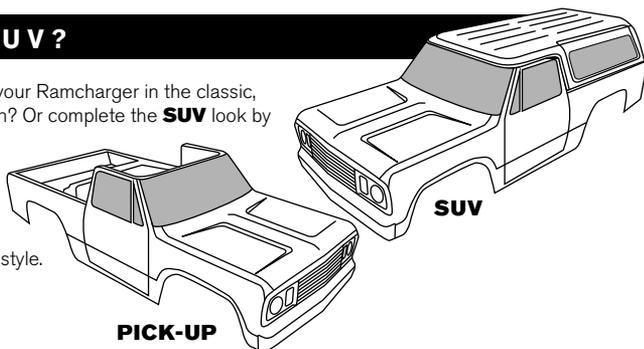

PICK-UP

SUV

2 TRIM MAIN BODY

If using **PICK-UP** configuration, trim around entire window and windshield frame to remove the rear part of the "cab".

If using **SUV** configuration, trim on the marked trim line to remove the rear part of the cab, but leave the top Shell Mounting Platform intact.



3 INSTALL INTERIOR

Trim Interior and Dash pieces on the marked trim lines. Attach dash to Interior with shoo-goo or CA glue (*not included*).

Install interior by using shoo-goo or high-strength double-sided tape (*not included*). The front of interior sits flush under hood of main body and is captured by the body posts. Drill body post holes into main body and interior to fit your desired chassis. Please note that some trimming of the interior may be required to create clearance around your crawler chassis' gearbox.

If you chose the **PICK-UP** configuration, congrats! You're done and ready to hit the trails. If you are using the **SUV** camper shell, continue to Step 4.

4 TRIM AND INSTALL SHELL

Trim Camper Shell on indicated lines, being careful to leave all tabs at the bottom of the shell intact as these are needed for mounting.

Bend 2 middle side tabs and 1 rear tab inward to be flush to the top of the truck bed rails. **SEE FIGURE 1.** Place low-profile Velcro or high-strength double-sided tape (*not included*) on the bottom of these tabs and on the corresponding areas of the truck bed rails.

Cut 4 slots into bed rails of the main body on indicated lines. These slots will align Camper Shell to the bed of the truck. Place low-profile Velcro or double-sided tape (*not included*) on the Shell Mounting Platform and on the corresponding area on underside of Camper Shell. **SEE FIGURE 1.**

Insert your Camper Shell into the side slots and attach to the main body to complete the **SUV** look. **SEE FIGURE 2.**




FIGURE 1




FIGURE 2